


# EZ-EV SLIM

QUICK INSTALLATION – NO MESS



Additional product info,  
videos, and photos  
can be found at

**EZ-CRETE.COM**

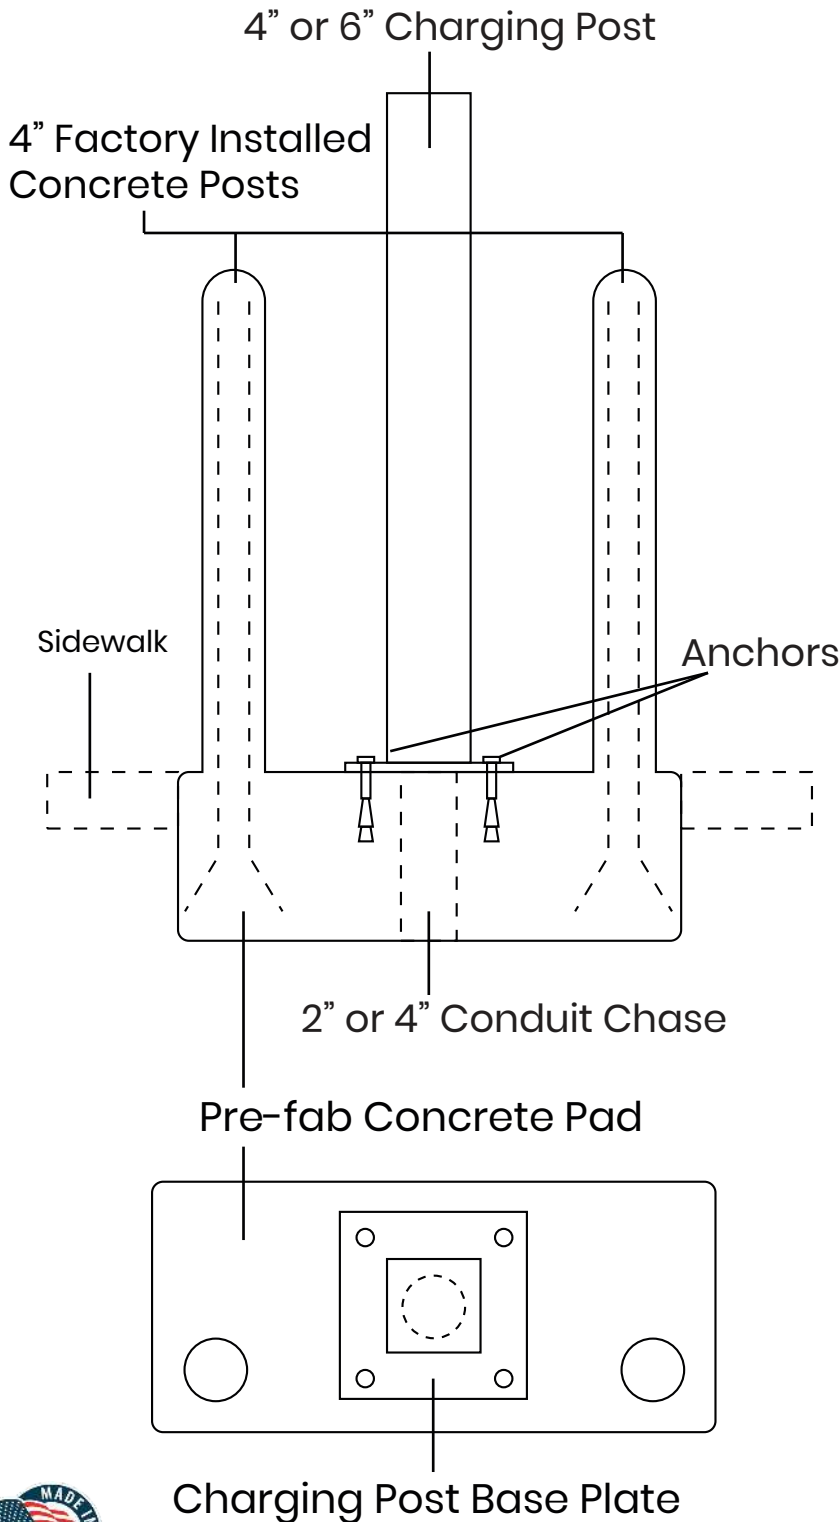

## SPECS:

- Weight: 700 lbs
- Dimensions: 36"L x 16"W x 12"H
- Concrete Post: 4 1/2" Diameter x 36"H
- Concrete Strength: 5000 PSIA
- Inserts: Lifting Hook
- Conduit Size: 2 or 4 Inch

## INSTALLATION:

Dig hole as deep as required for conduit.

Fill hole with crushed stone so that pad will be level with final grade.

Place pad over conduit installed prior to placing using lifting pins.

## Notes:

- Frost protection not required per exception on IBC1809.5, free standing and minimal lateral load.
- Anchoring options or approved equal
  - 5/8" Ø HILTI KWIK BOLT 3 expansion anchor, min. embed = 5"
  - 1/2" Ø HILTI HIT-Z rod with HILTI HIT HY-200 adhesive, min embed = 4 1/2"
- Maximum weight to be supported by pad = 1,500 pounds.
- Maximum windload = 150 mph
- Lead water away from base at the pad.

